


ГИ-11Б


СЦЗ.323.000ТУ

Metal Ceramic Valve
for operation in self-excited oscillator
with internal feedback through anode-ca-
thode capacitance

Connection
electrodes
with terminals

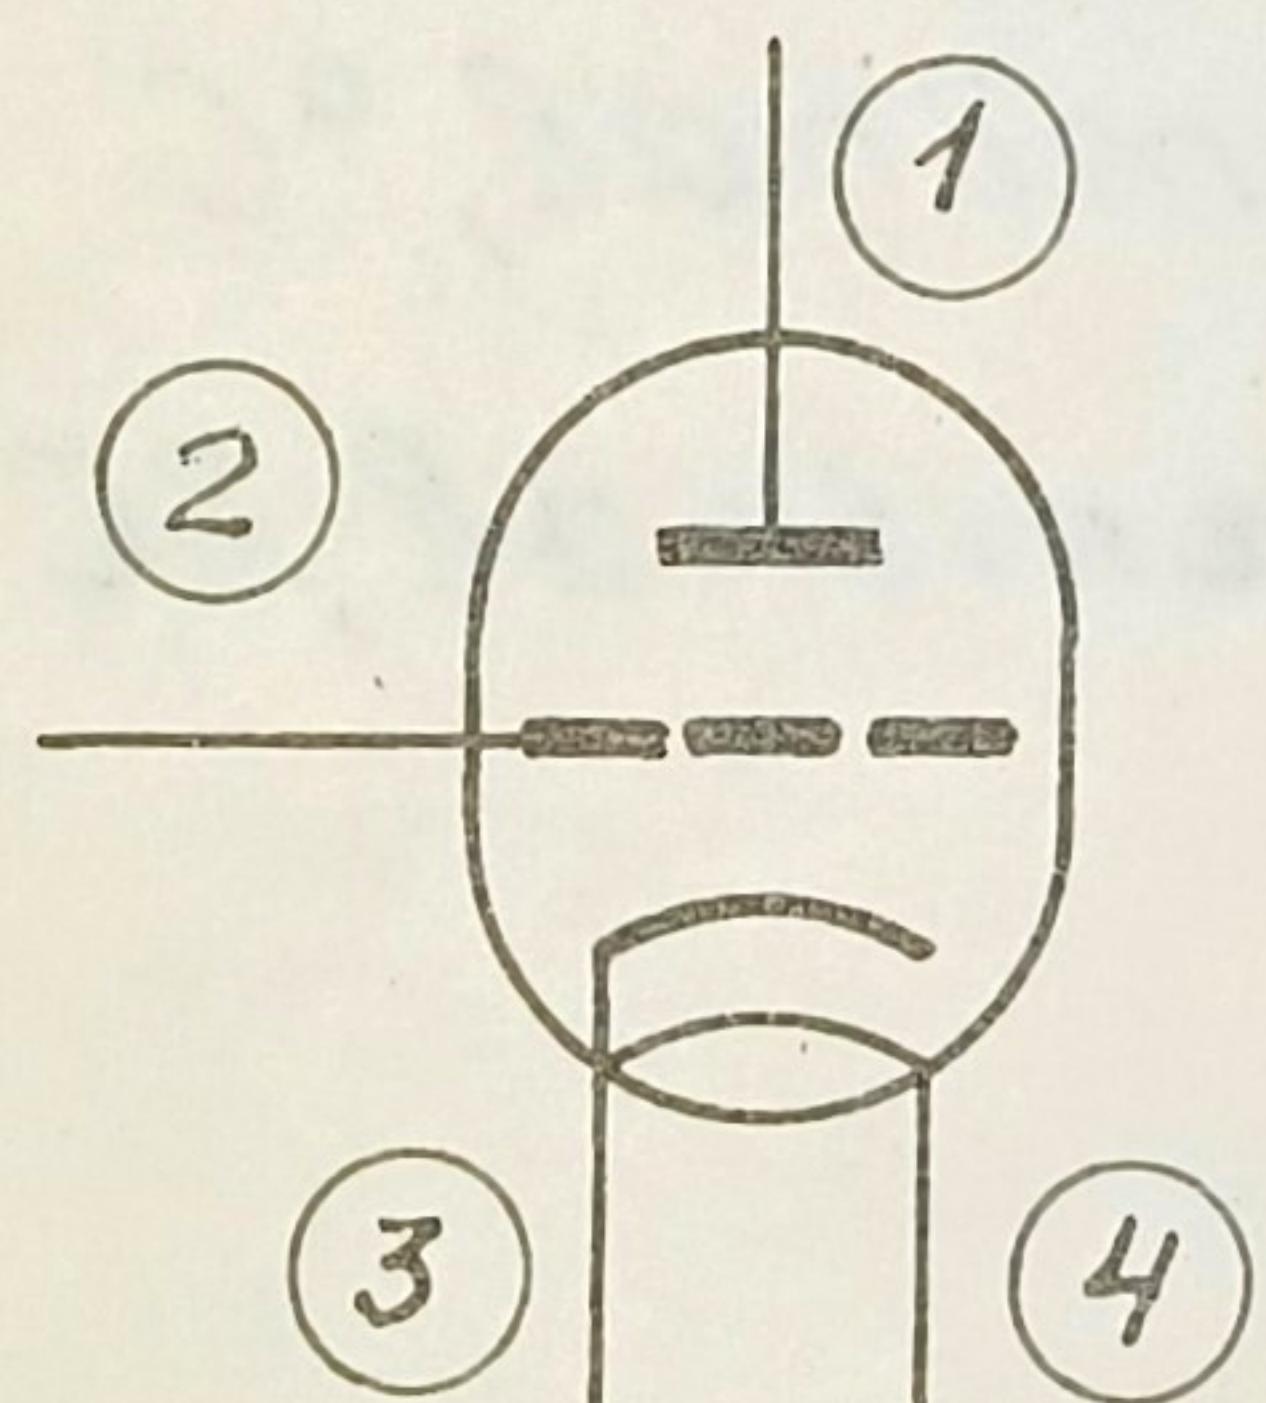

Electrodes terminal:

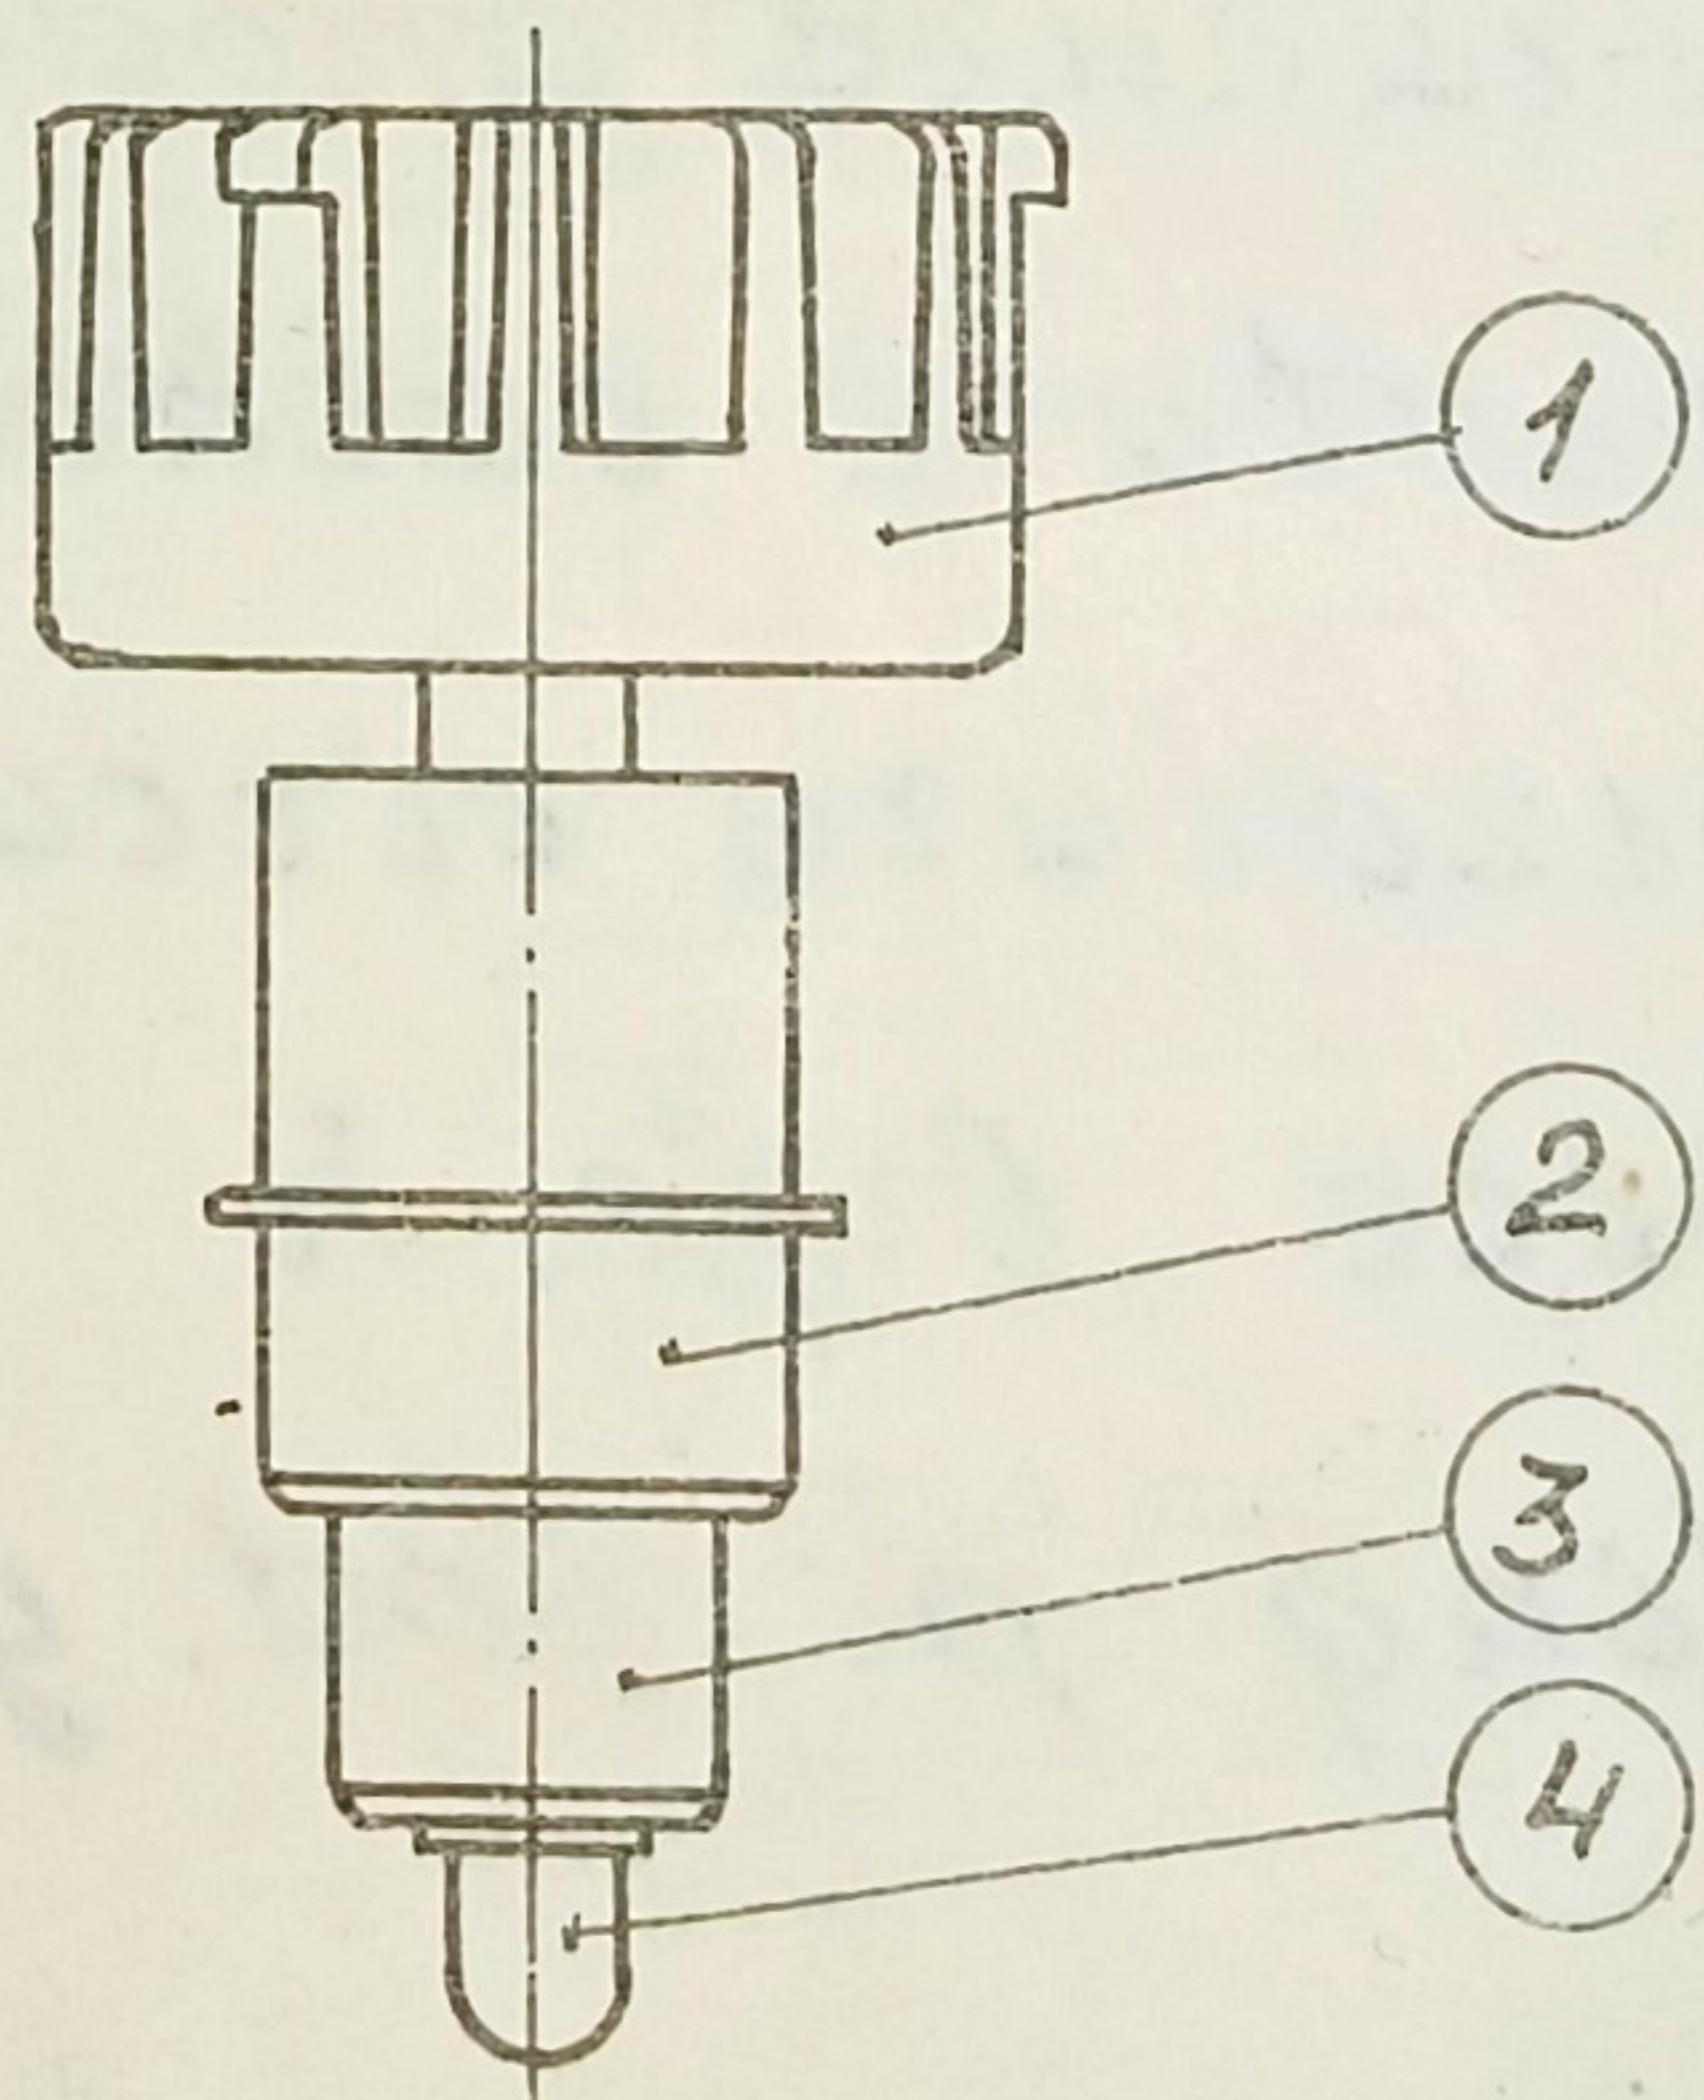

① - anode

② - grid

③ - cathode-heater

④ - heater

Maximum ratings	
Anode dissipation, W	80
Anode dissipation without forced cooling, W	20
grid dissipation, W	2
Anode voltage, V	800
Anode peak pulse voltage (duration of pulse $\leq 5\mu s$), V	2000
Cathode current (meaning effective), mA	150
Cathode pulse current (duration of pulse $\leq 5\mu s$), A	1.5
Grid circuit resistance, k Ω	10
Temperature anode's terminal, °C	200
Temperature cathode's terminal, °C	100
Temperature circuit's terminal, °C	120
Service life, h	500
Holding period, years	12